

www.versigrid.com



VersiGrid Bonner MT

Manufacturer's Fact Sheet Farm and AG **VersiGrid™ M/D1.5 grade**

Branded as VersiGrid™ in the USA and Canada

Product Name:

Made in the USA

self-connecting grid tiles: 12" x 12" x 1.5 inches tall (30.48 x 30.48 x 3.81 cm) made of durable elastic high-pressure recycled plastic.

Product Description:



The grid tiles are resistant to fracture (flexible from -58 to +194 F, -50 to +90 C) resistant to UV and freezing


Resistant to ammonia, most acids, street salt, gasoline, and petroleum products
100% recycled content/recyclable content.

VersiGrid™ M/D1.5 is safe to use around ground water and plants

Suggested Applications and usages:

Equine Applications

Horse stables, paddocks, arenas
Turnouts and riding paths
Race tracks
Side yards at homes
Slope retention for hillsides and erosion control
Livestock wash areas
Driveways and parking areas.
Drainage culverts and ditches
Dog kennels and runs
Grassy Park public areas
Driving roadways through lawns

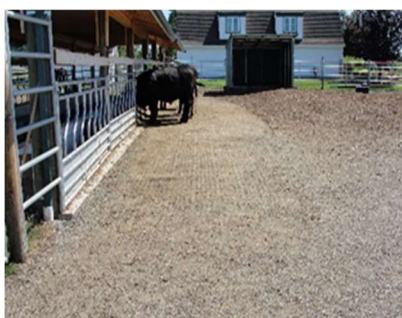

Cattle and Dairy Applications

Feedlot footing
Pasture management (prevention of nutrient runoff into surface waterways)
Exercise/turnout areas
Pervious confinement pen flooring
Traffic paths through pastures (prevents soil compaction/mud creation)
Trailing and loadout areas

Other Applications

Loading zones
Drainage culverts and ditches
Slope retention and erosion control
Pervious Parking - green grass parking lots
Pervious Parking - natural crushed gravel roadways and driveways.
Grass Reinforcement - prevention of damage to root structures from traffic

Installation:

VersiGrid™ M/D1.5 may be "cut to fit" at the installation site quickly and free of problems, pre-cutting is not required. **VersiGrid™ M/D1.5** may be cut with an angle grinder or circular saw, for small jobs with the compass saw or handsaw and the like.

refer also to:

Brochures, etc » www.versigrid.biz/brochures_downloads

Technical Information: * According to current state of knowledge without claim to completeness.





The following typical, generic information is provided for illustration purposes only.

VersiGrid™ M/D1.5 grade

Dimensions: 12" x 12" x 1.5 inches tall
(30.48 x 30.48 x 3.81 cm)
Cell width: 2.2 inches avg. (5.58 cm)
Porosity: 86% Open
Wall thickness I/O: 0.150 / 0.200 inches
Weight: 1.46 lbs ea (7.10 kg ea)

Compressive Strength: more than 12.3 US t/ft² (120t/m²)
Load bearing capacity:
Standard color: 25 tons/axle (22.7 mt/axle)
black



Material: 100% recycled plastic, proprietary blend [<5% pigment, Anti-UV, carrier agents, etc.

The following are

provided only as concepts and guidelines.

These are not provided as specific installation instructions. Please request information concerning your project ...

Colorant: Coloring by means of 1-3% pigment, UV-Stabilized
Stability of shape: Temperatures from -58 to +194 F (-50 - +90 C)
Change of Shape: <0.5% (at median temperature +68 to +176 F)
Absorption of moisture: 0.01%
Environmental compatibility: harmless to plants, soil, air, and water micro-organisms, groundwater neutral
Solubility: Resistant to acids and solutions (salt, Ammonia, acid rain, etc.) as well as alcohol.

Guaranteed resistance to pressure of the surface: 12 US Tons/ft² || 120 mt/m²

Delivery form: 12 pieces per sheet ("layer" on pallet)
Installation speed: up to 1000 ft²/hour/man (100 m²)

Ground Preparation:
(generic, not site-specific):



Installation:

Backfill:

Depends upon site condition: LOCAL conditions and usage will prevail.

- **Drainage - if required:** Construct a drainage layer using 5/8" - 1.5" clean, angular gravel (a.k.a "#57 Clean", 5mm-38mm diameter)
Depth of this layer will depend upon the local soil type, ground condition and climate. From 2 - 24" depth (5-61 cm)
- **Subbase:** Introduce an equalizing (leveling) layer of 5/8"-3/4" diameter clean/washed, angular gravel. Depth of this layer should be a minimum of 2-4 inches (5 to 10 cm)
Gravel/sandy soil mix (60/40) is used for grass applications
Lay out the pre-assembled 12-piece layers of grids, snap them together and consolidate by tamping with plate vibrator or heavy cylinder.
- For backfill, an angular or round medium may be used.
- Fill the open cells with 5/8" diameter or smaller clean, washed gravel.

Finished Surface:

For ease of cleaning, an overfill is recommended.

For the overfill/top cover, a rounded clean stone ("p-gravel," "coarse grit" or "buckshot") and/or clean sand may be used.

The size of the backfill medium should be sufficient to preserve drainage (sufficient void space), and to resist migration (due to wind or water), while remaining small enough to provide cushion and to work easily with hand tools.

Delivery: VersiGrid™ M/D1.5

Pallet= 696 ft² (64.66 m²) = 58 layers (1 layer= 12 pieces) = 696 pieces/Pallet

Pack dimensions

Dimensions of pallet : = 37 x 49 x 95 inches (93.98 x 124.46 x 241.30 cm)
Approx Weight/ pallet : = 1,060 lbs/pallet (480.81 kg/pallet)
Contents of Container : = varies per carrier (20 or more pallets/load typ.)

Reprint and Copyright:

2024 Copyright VersiGrid™ Bonner MT All Rights Reserved.

This document may be reproduced by the customers, clients and partners of VersiGrid™ Bonner MT.

This copyright Information must remain on all reproduced copies.