


Material Specifications:

VersiGrid™ 1m1.0


© 2018 VersiGrid™ Bonner MT USA
All rights reserved

Material:	100% Recycled Plastic
Standard Color:	Black
Dimensions:	12" x 12" x 1"
Porosity:	85% Open, before filling
Cell size:	2.20" avg. (5.69cm)
Wall thickness	0.135" (0.3175cm)
Weight/piece:	1 lbs./piece (0.45 kg/piece)
Weight/assembled mat:	12 lbs/12 piece mat (5.44 kg/12 piece mat)
Compressive strength:	>20 UStons/ft² (215 metric tons/m²)
Load Capacity:	>20 UStons/axle (18.14 MT/axle)
Stability of Shape:	-58°F to +194°F (-50°C to +90°C
Chemical Resistance:	Resistant against acid and leaching compounds, alcohol, or similar solvents.
Coverage/piece:	1.00/ft² (0.09 m²)
Coverage/assembled mat:	12.00/ft² (1.11 m²)
Installation rate:	up to 1,000 ft²/man-hour

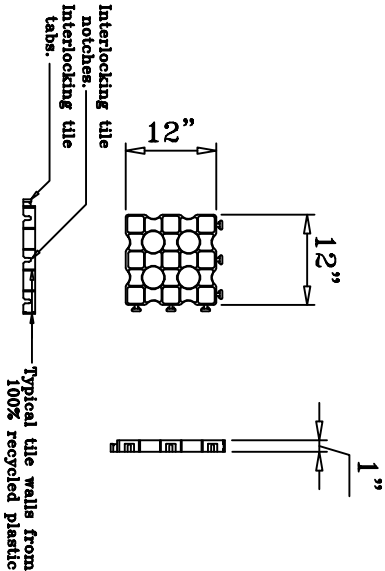


Typical Grid Tile

no scale

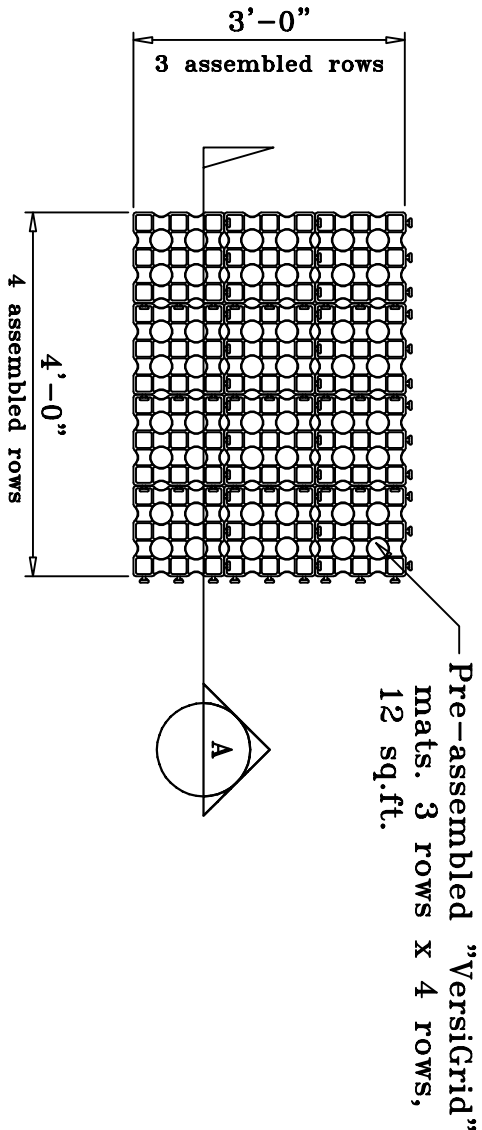

Pre-assembled Mats

no scale

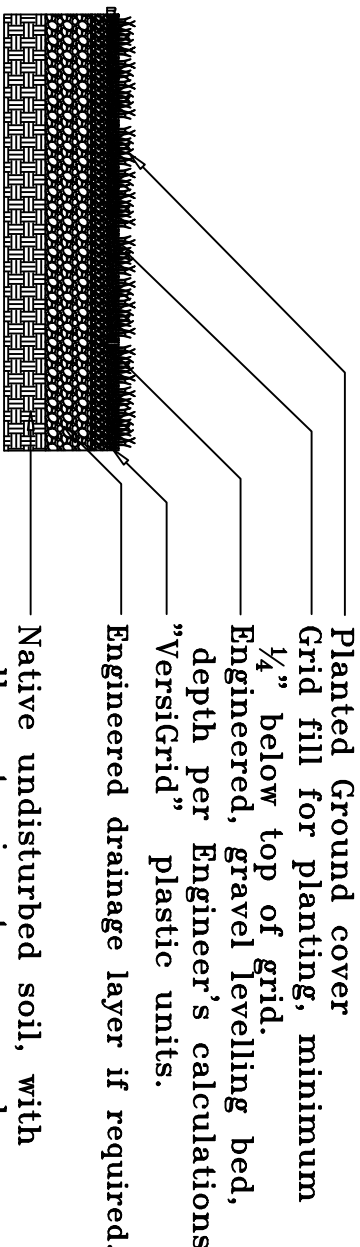

Typical Section A

no scale